


8-Channel Source Drivers


Features and Benefits

- TTL, DTL, PMOS, or CMOS compatible inputs
- 500 mA output source current capability
- Transient-protected outputs
- Output breakdown voltage to 50 V
- DIP or SOIC packaging

Packages:



18-pin DIP (suffix A)



18- and 20-pin
SOICW (suffix LW)

Not to scale

Description

Recommended for high-side switching applications that benefit from separate logic and load grounds, these devices encompass load supply voltages to 50 V and output currents to -500 mA. These 8-channel source drivers are useful for interfacing between low-level logic and high-current loads. Typical loads include relays, solenoids, lamps, stepper and/or servo motors, print hammers, and LEDs.


All devices may be used with 5 V logic systems—TTL, Schottky TTL, DTL, and 5 V CMOS. The device packages offered are electrically interchangeable, and will withstand a maximum output off voltage of 50 V, and operate to a minimum of 5 V. All devices in this series integrate input current limiting resistors and output transient suppression diodes, and are activated by an active high input.

The suffix “A” indicates an 18-lead plastic dual in-line package with copper lead frame for optimum power dissipation. Under normal operating conditions, these devices will sustain 120 mA continuously for each of the eight outputs at an ambient temperature of +50°C and a supply of 15 V.


The suffix “LW” packages are provided in a 20-lead wide-body SOIC package with improved thermal characteristics. The A2982ELW drivers are available for operation over an extended temperature range to -40°C.

These packages are Pb (lead) free (suffix ‘-T’), with 100% matte-tin leadframe plating.

Simplified Block Diagram

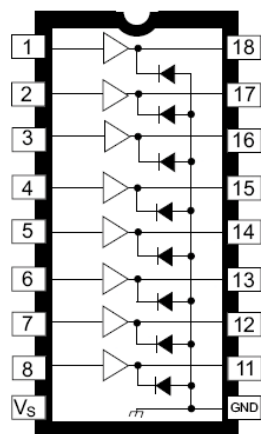

18-pin A Package

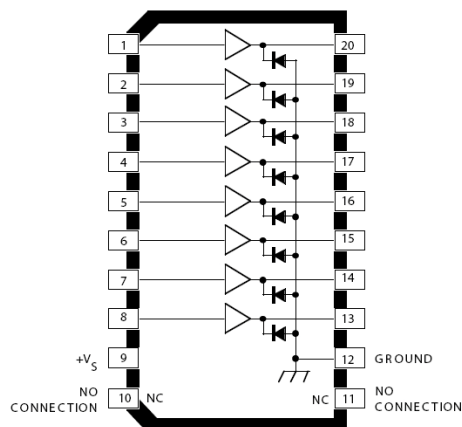

20-pin LW Package

(NC pins omitted for 18-pin package)

Selection Guide¹



Part Number	Pb-free	Package	Packing	Ambient Temperature (°C)
A2982ELW-T	Yes	20-pin SOICW	37 per tube	-40 to 85
A2982ELWTR-T	Yes	20-pin SOICW	1000 per reel	
A2982SLW-T	Yes	20-pin SOICW	37 per tube	-20 to 85
A2982SLWTR-T	Yes	20-pin SOICW	1000 per reel	
UDN2981A-T	Yes	18-pin DIP	21 per tube	
UDN2982A-T	Yes	18-pin DIP	21 per tube	

¹Pb-based variants are being phased out of the product line. Some variants cited in this footnote are in production but have been determined to be LAST TIME BUY. This classification indicates that sale of this device is currently restricted to existing customer applications. The variants should not be purchased for new design applications because obsolescence in the near future is probable. Samples are no longer available. Status change April 30, 2007. Deadline for receipt of LAST TIME BUY orders: August 24, 2007; these variants include: UDN2982LW, UDN2982LW-T, UDN2982LWTR, UDN2982LWTR-T, UDQ2982LW-T, and UDQ2982LWTR-T.

Absolute Maximum Ratings

Characteristic	Symbol	Notes	Rating	Units
Output Voltage Range	V_{CE}		5 to 50	V
Input Voltage	V_{IN}	UDN2981	25	V
		A2982, UDN2982	20	V
Output Current	I_{OUT}		-500	mA
Package Power Dissipation	P_D	See graph	—	—
Operating Ambient Temperature	T_A	Range E	-40 to 85	°C
		Range S	-20 to 85	°C
Maximum Junction Temperature	$T_{J(max)}$		150	°C
Storage Temperature	T_{stg}		-55 to 150	°C

One of Eight Drivers

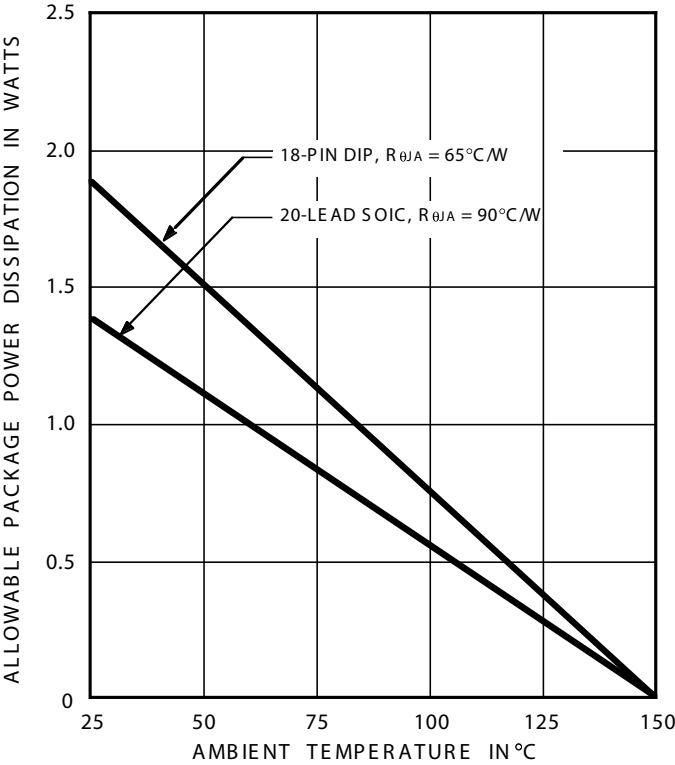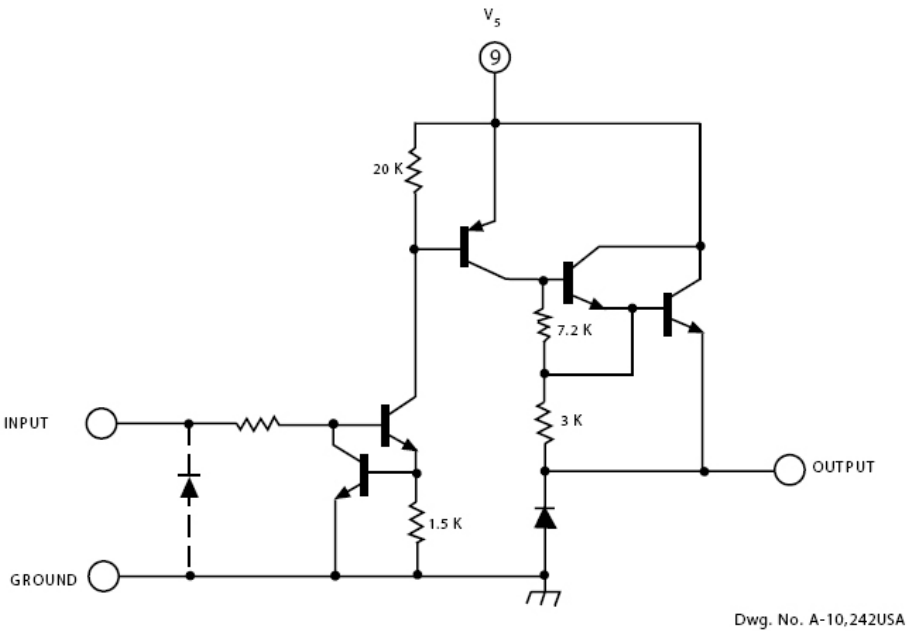

Dwg. GP-022-4A

ELECTRICAL CHARACTERISTICS¹ at T_A = +25°C (unless otherwise specified).







Characteristic	Symbol	Variant	Test Conditions	Test Fig.	Min.	Typ.	Max.	Units
Output Leakage Current ²	I _{CEX}	All	V _{IN} = 0.4 V, V _S = 50 V, T _A = +70°C	1	—	—	200	μA
Output Sustaining Voltage	V _{CE(SUS)}	All	I _{OUT} = -45 mA	—	35	—	—	V
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	All	V _{IN} = 2.4 V, I _{OUT} = -100 mA	2	—	1.6	1.8	V
			V _{IN} = 2.4 V, I _{OUT} = -225 mA	2	—	1.7	1.9	V
			V _{IN} = 2.4 V, I _{OUT} = -350 mA	2	—	1.8	2.0	V
Input Current	I _{IN(ON)}	2981	V _{IN} = 2.4 V	3	—	140	200	μA
			V _{IN} = 3.85 V	3	—	310	450	μA
		2982	V _{IN} = 2.4 V	3	—	140	200	μA
			V _{IN} = 12 V	3	—	1.25	1.93	mA
Output Source Current (Outputs Open)	I _{OUT}	2981	V _{IN} = 2.4 V, V _{CE} = 2.0 V	2	-350	—	—	mA
		2982	V _{IN} = 2.4 V, V _{CE} = 2.0 V	2	-350	—	—	mA
Supply Current Leakage Current	I _S	All	V _{IN} = 2.4 V*, V _S = 50 V	4	—	—	10	mA
Clamp Diode Current	I _R	All	V _R = 50 V, V _{IN} = 0.4 V*	5	—	—	50	μA
Clamp Diode Forward Voltage	V _F	All	I _F = 350 mA	6	—	1.5	2.0	V
Turn-On Delay	t _{ON}	All	0.5 E _{IN} to 0.5 E _{OUT} , R _L = 100Ω, V _S = 35 V	—	—	1.0	2.0	μs
Turn-Off Delay ³	t _{OFF}	All	0.5 E _{IN} to 0.5 E _{OUT} , R _L = 100Ω, V _S = 35 V, See Note	—	—	5.0	10	μs

¹Negative current is defined as coming out of (sourcing) the specified device terminal.

²All inputs simultaneously.


³Turn-off delay is influenced by load conditions. Systems applications well below the specified output loading may require timing considerations for some designs, i.e., multiplexed displays or when used in combination with sink drivers in a totem pole configuration.

TEST FIGURES

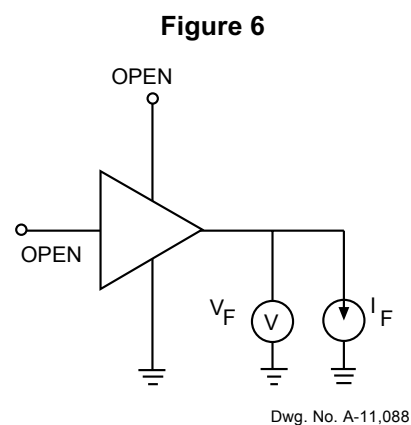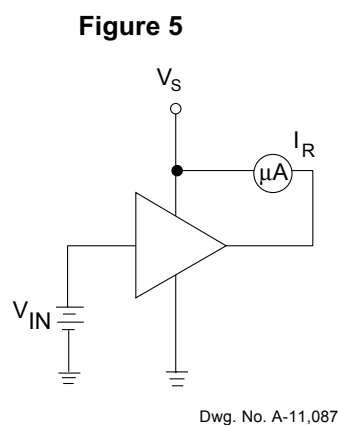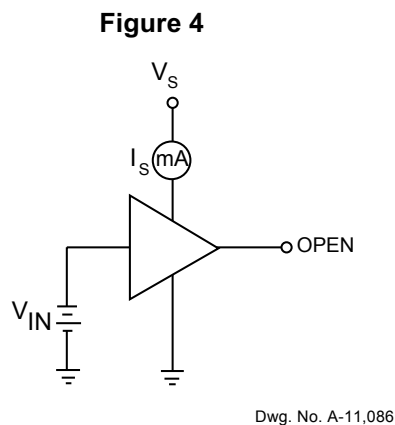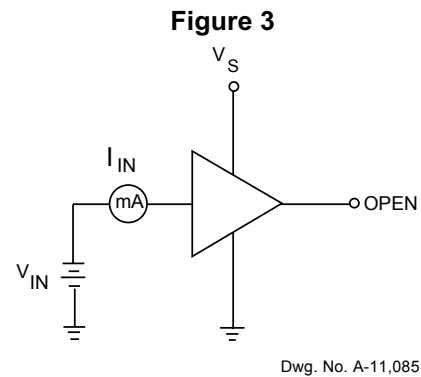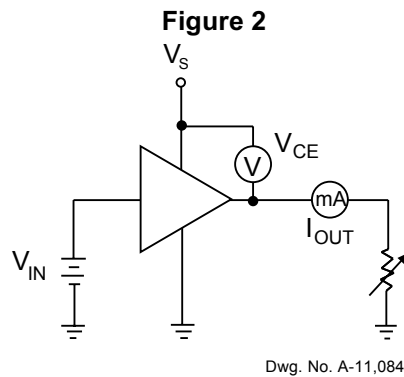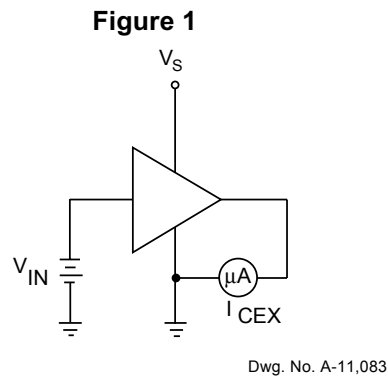


Allowable peak collector current as a function of duty cycle

UDN2981A and UDN2982A

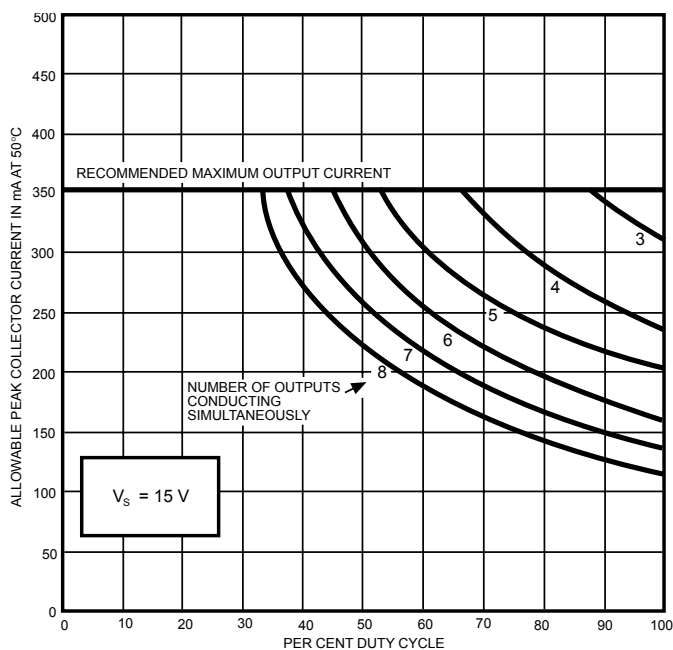


Dwg. No. A-11,107B

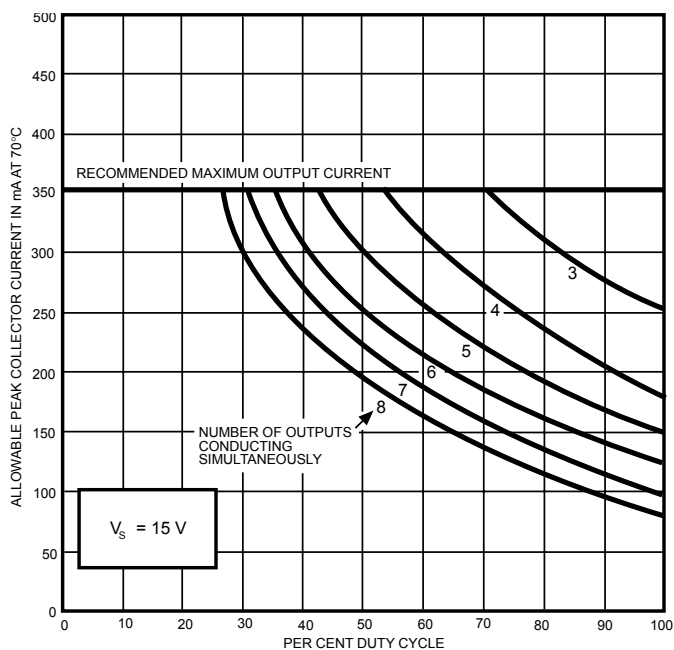


Dwg. No. A-11,108B

Input current as a function of input voltage

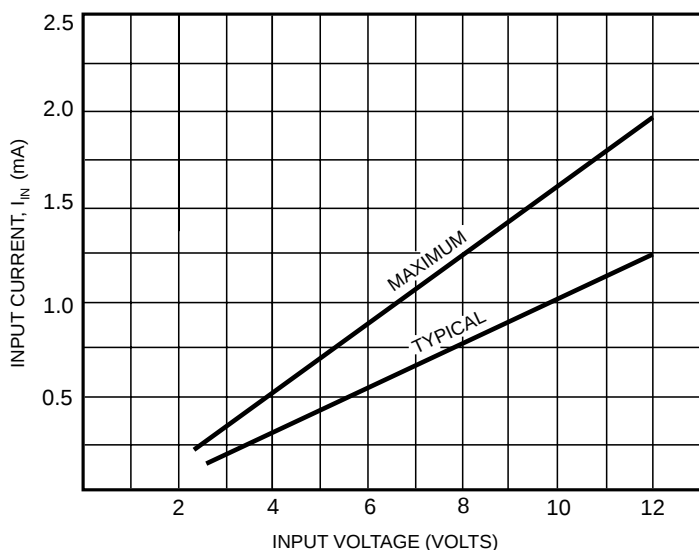


Dwg. No. A-11,115B

Typical electrosensitive printer application

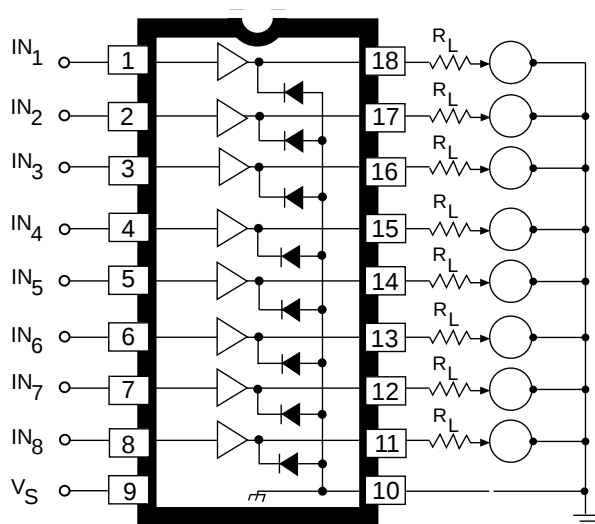


Dwg. No. A-11,113A


A Package, 18-Pin DIP

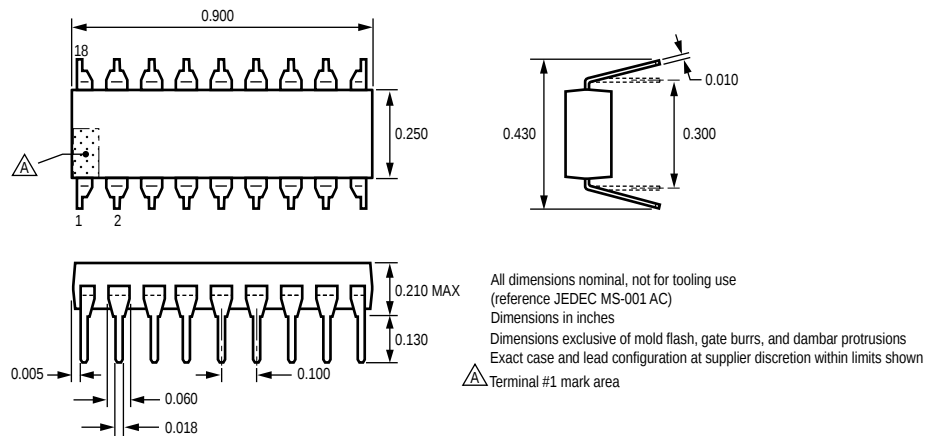

LW Package, 18-Pin SOICW

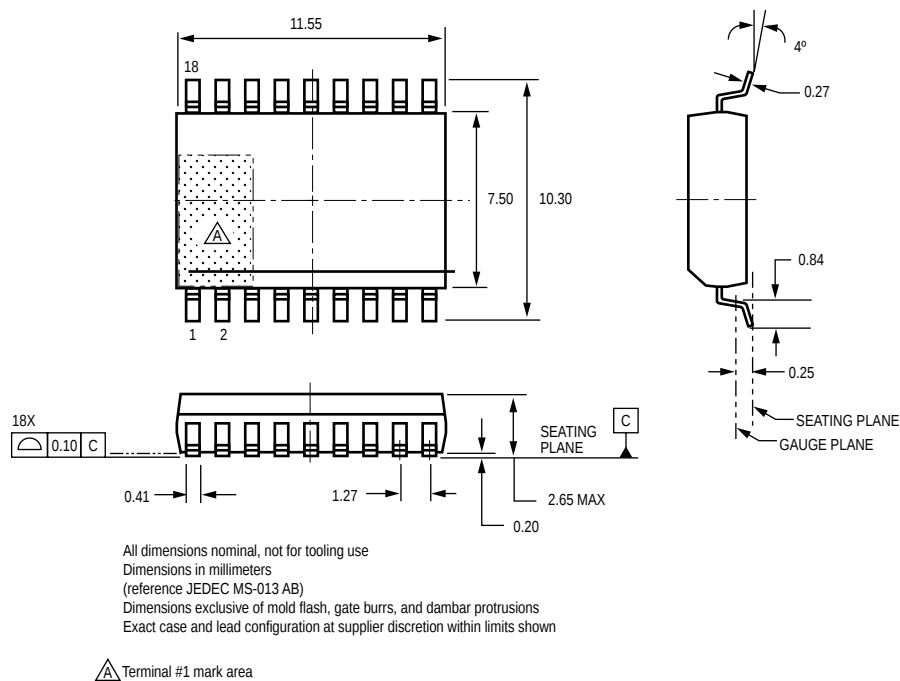

LW Package, 20-Pin SOICW

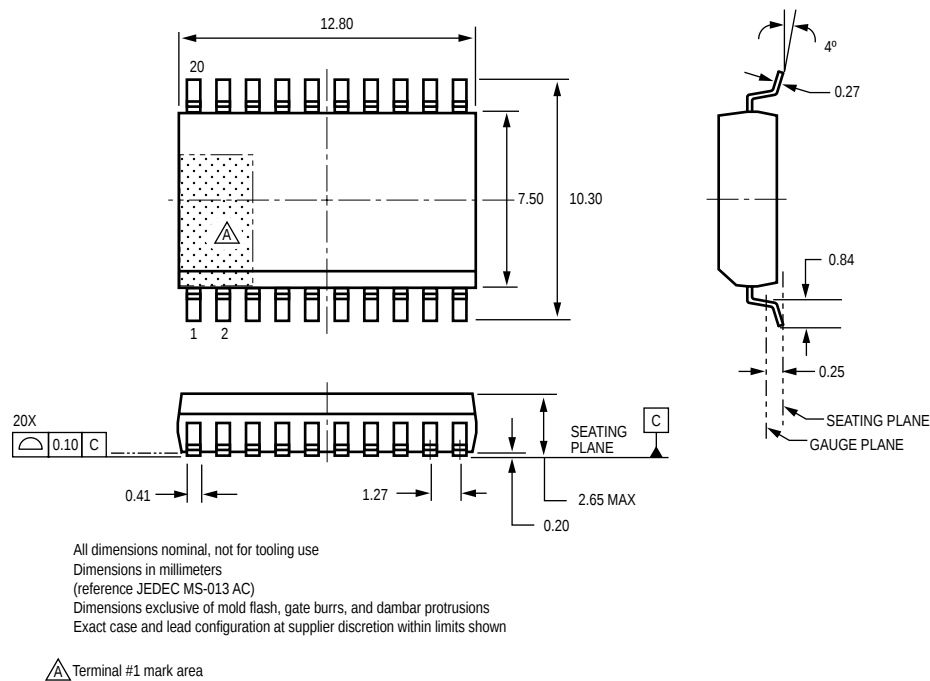

Copyright ©1977, 2007, Allegro MicroSystems, Inc.

The products described here are manufactured under one or more U.S. patents or U.S. patents pending.

Allegro MicroSystems, Inc. reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in life support devices or systems, if a failure of an Allegro product can reasonably be expected to cause the failure of that life support device or system, or to affect the safety or effectiveness of that device or system.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems, Inc. assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

For the latest version of this document, visit our website:

www.allegromicro.com