

Small size & high efficiency, worldwide input (80 VAC to 280 VAC),
and constant current control with simple LED drive circuit !

IPD for LED-lighting MIP551/MIP552

Overview

MIP551/MIP552 is the best device for LED-lighting.

LED-lighting using MIP551/MIP552 has small size & high efficiency by simple design in worldwide input voltage (80 VAC to 280 VAC), and has dimmer control function by external signal.

Feature

- Worldwide input voltage, 80 VAC to 280 VAC
- Typical LED peak current
MIP551 : 0.5 A
MIP552 : 1.0 A
- * Peak current can be adjusted in two-stage corresponding to the input voltage.
- Dimmer control function : EX-pin voltage range, 0 V to 3 V
- Function to set input voltage that can be driven : L-pin voltage range
- Over temperature protection for IPD (Auto-restart)

Applications


LED-lighting
HB-LED drive circuit

Specifications

Item	Package	VDSS	fosc	IDpeak	RON	Maximum ¹⁾ output power (Ta=25°C)
MIP5510MSSCF	DIP7-A1	≥700V	44 kHz (typ.)	0.5A (typ.)	12Ω(typ.)	10W (Io=0.35A, C3=47μF)
MIP5520MDSLJ	TO-220IPD7-A2			1.0A (typ.)	6Ω(typ.)	30W ²⁾ with heat sink (Io=0.70A, C3=220μF)

- The maximum output power is different depending on parts and ambient conditions, so the following value is a reference value.
- When the input power is more than 25W, it is necessary to connect PFC circuit in input side.
- It is possible to drive without the smoothing aluminum electrolytic capacitor when the input voltage detecting function is used.
- When the line voltage detecting function or LED dimmer control function is not used, the circuit can be simplified.

Example of typical application circuit for LED-lighting

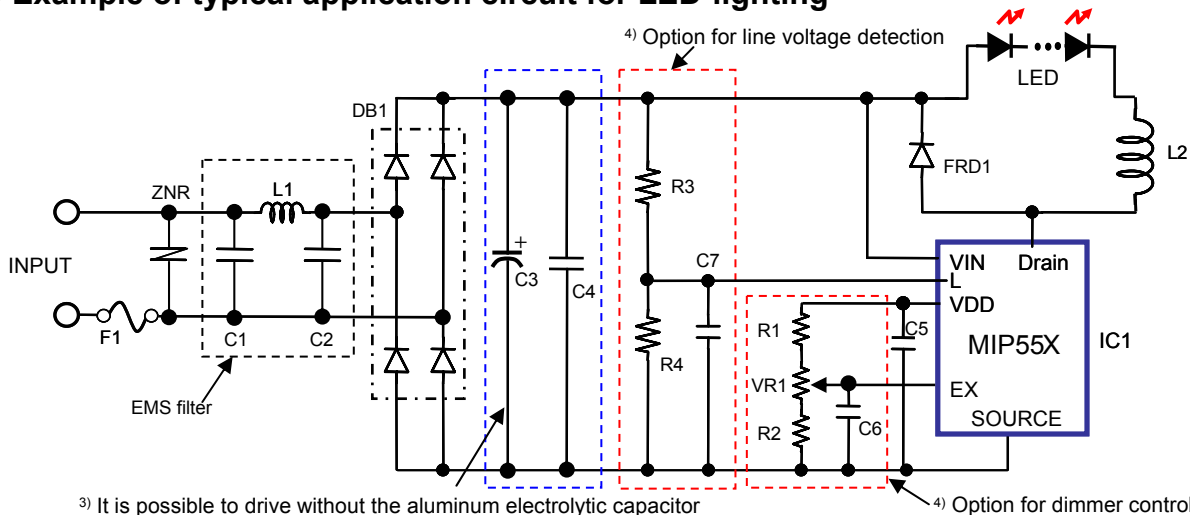


Products and specifications are subject to change without notice.
Please ask for the latest Product Standards to guarantee the satisfaction of your product requirements.

New publication, effective from 22 Dec. 2006
M00782AE

Semiconductor Company, Matsushita Electric Industrial Co., Ltd.
1 Kotari-yakemachi, Nagaokakyo, Kyoto 617-8520, Japan
Tel. +81-75-951-8151
<http://panasonic.co.jp/semicon>

•DIP7-A1 (MIP551)


Unit: mm



Pin No.	Pin Name
1	VDD
2	EX
3	L
4	VIN
5	DRAIN
6	NC
7	SOURCE
8	SOURCE


•TO-220IPD7-A2 (MIP552)

Unit: mm

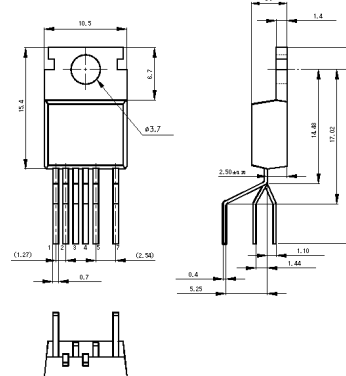


Pin No.	Pin Name
1	EX
2	L
3	VDD
4	SOURCE
5	VIN
6	NC
7	DRAIN

■ Explanation of function terminal

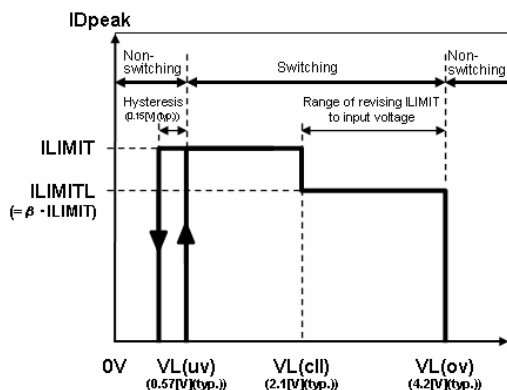


L pin voltage vs ID_{peak}

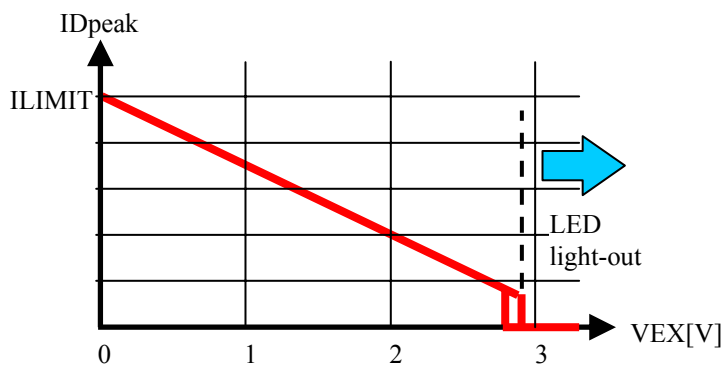


EX pin voltage vs ID_{peak}


■ Waveform image

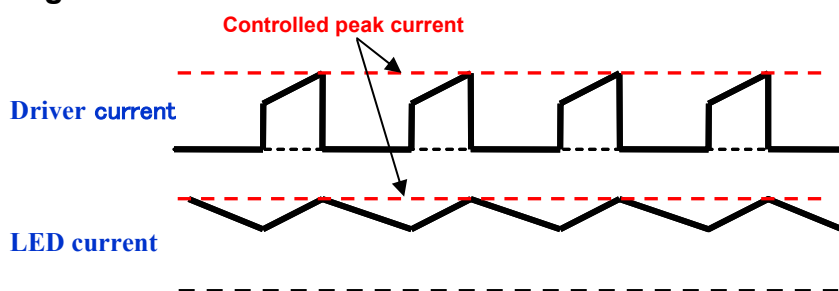


DRAIN current waveform and LED current waveform

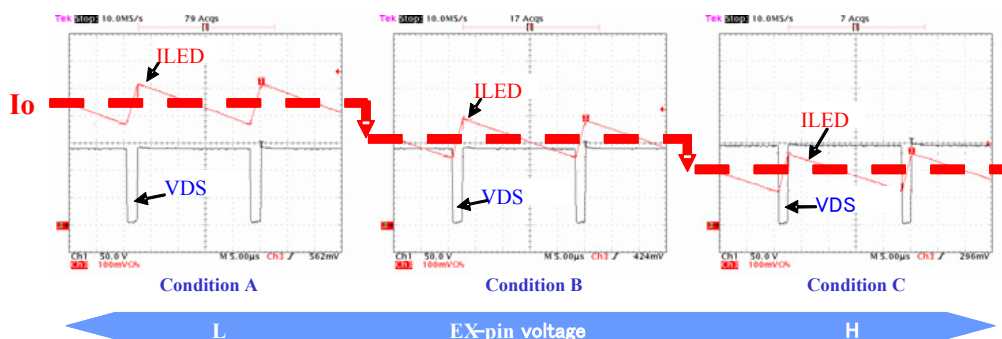

■ Reference data DRAIN peak current and LED average current vs EX pin voltage

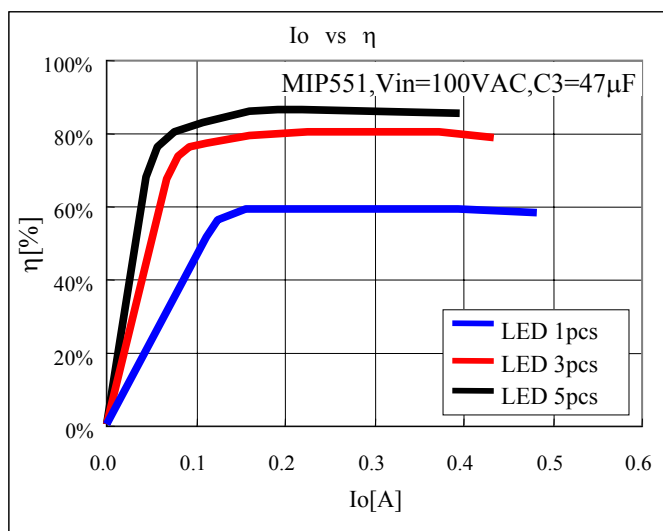

MIP5510MSSCF Output characteristic

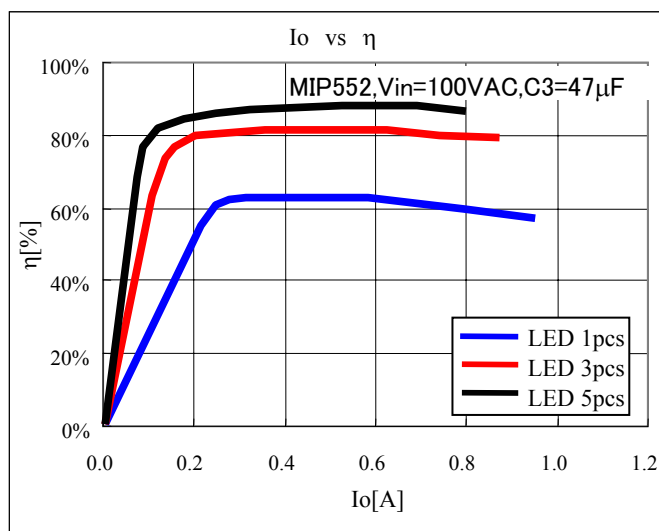

MIP5520MDSLJ Output characteristic