

Features and Benefits

- 4.5V to 24V Operation
- -40°C to 150°C Superior temperature operation
- Bipolar technology
- Open-collector 25 mA output
- Reverse battery protection
- Small Size-SOT23 3L or SIP 3L
- Solid-state reliability
- Resistant to physical stress
- Activate with small, commercially available Permanent magnets

Application Examples

- Automotive, Consumer and Industrial
- Solid-state switch
- Brushless DC motor commutation
- Speed detection
- Linear position detection
- Angular position detection
- Proximity detection




3 pin SOT23 (suffix SO)



3 pin SIP (suffix UA)

Functional Block Diagram

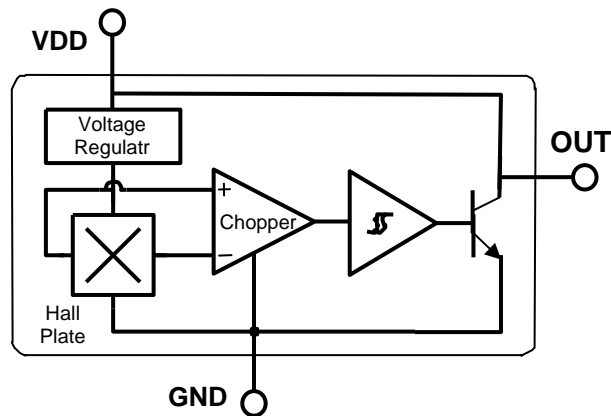

SIP Package

Pin 1 – V_{DD}

Pin 2 – GND

Pin 3 – OUT

SOT Package

Pin 1 – V_{DD}

Pin 2 – OUT

Pin 3 – GND

General Description

The SS441 is a unipolar Hall-effect sensor IC fabricated from bipolar technology. The device integrates a voltage regulator, reverse battery protection diode, Hall sensor with dynamic offset cancellation system, temperature compensation circuitry, small signal amplifier, Schmitt trigger and an open-collector output to sink up to 25 mA. With suitable output pull up, they can be used with bipolar or CMOS logic circuits.

These Hall-effect switches are monolithic integrated circuits with tighter magnetic specifications, designed to operate continuously over extended temperatures to +150°C, and are

more stable with both temperature and supply voltage changes. The unipolar switching characteristic makes these devices ideal for use with a simple bar or rod magnet.

Thanks to its wide operating voltage range and extended choice of temperature range, it is quite suitable for use in automotive, industrial and consumer applications.



The device is delivered in a Small Outline Transistor (SOT) or in a Plastic Single In Line (SIP 3L flat). Both 3-lead packages are RoHS compliant.

Glossary of Terms

| | | |
|------------------------------|--|--|
| MilliTesla (mT), | Gauss | Units of magnetic flux density: 1mT = 10 Gauss |
| RoHS | Restriction of Hazardous Substances | |
| Operating Point (B_{OP}) | Magnetic flux density applied on the branded side of the package which turns the output driver ON ($V_{OUT} = V_{DSon}$) | |
| Release Point (B_{RP}) | Magnetic flux density applied on the branded side of the package which turns the output driver OFF ($V_{OUT} = \text{high}$) | |

Pin Definitions and Descriptions

| SOT Pin № | SIP Pin № | Name | Type | Function |
|-----------|-----------|------|--------|-----------------------|
| 1 | 1 | VDD | Supply | Supply Voltage pin |
| 2 | 3 | OUT | Output | Open Drain Output pin |
| 3 | 2 | GND | Ground | Ground pin |

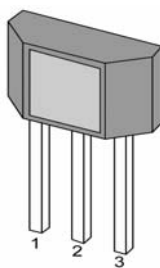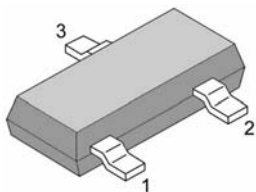

Absolute Maximum Ratings

| Parameter | Symbol | Value | Units |
|---------------------------|--------|------------|-------|
| Supply Voltage | VDD | 28 | V |
| Supply Current | IDD | 50 | mA |
| Output Voltage | VOUT | 28 | V |
| Output Current | IOUT | 50 | mA |
| Storage Temperature Range | TS | -65 to 170 | °C |

Absolute maximum ratings

| Operating Temperature Range | Symbol | Value | Units |
|-----------------------------|--------|------------|-------|
| Temperature Suffix "E" | TA | -40 to 85 | °C |
| Temperature Suffix "K" | TA | -40 to 125 | °C |
| Temperature Suffix "L" | TA | -40 to 150 | °C |

Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum- rated conditions for extended periods may affect device reliability

General Electrical Specifications

DC Operating Parameters $T_A = 25^\circ\text{C}$, $V_{DD} = 4.5\text{V}$ to 24V (unless otherwise specified)


| Parameter | Symbol | Test Conditions | Min | Typ | Max | Units |
|---------------------------|--------|---|-----|------|-----|---------------|
| Supply Voltage | VDD | Operating | 4.5 | | 24 | V |
| Supply Current | IDD | $B < B_{RP}$ | 4 | 5 | 7 | mA |
| Output Saturation Voltage | VDSon | $I_{OUT} = 20\text{mA}$, $B > B_{OP}$ | | 0.3 | 0.5 | V |
| Output Leakage Current | IOFF | $B < B_{RP}$ $V_{OUT} = 24\text{V}$ | | 0.1 | 10 | μA |
| Output Rise Time | t_r | $R_L = 820\Omega$, $C_L = 20\text{pF}$ | | 0.04 | 2.0 | μs |
| Output Fall Time | t_f | $R_L = 820\Omega$, $C_L = 20\text{pF}$ | | 0.18 | 2.0 | μs |

Magnetic Specifications

DC Operating Parameters $V_{DD} = 4.5\text{V}$ to 24V (unless otherwise specified)



| Parameter | Symbol | Test Conditions | Min | Typ | Max | Units |
|-----------------|-----------|---|-----|-----|-----|-------|
| Operating Point | B_{OP} | $T_A = 25^\circ\text{C}$, $V_{DD} = 12\text{V}$ DC | 70 | 85 | 100 | G |
| Release Point | B_{RP} | | 20 | 40 | 70 | G |
| Hysteresis | B_{HYS} | | | 45 | | G |

Application Information

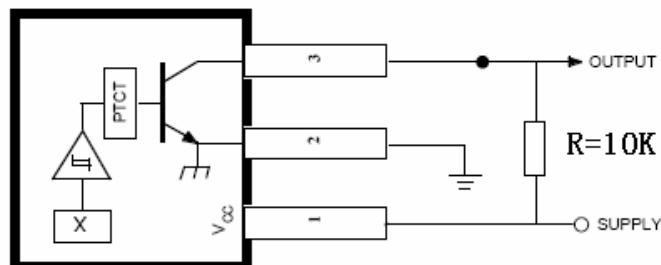


Package Information

Package A, 3-Pin SIP:

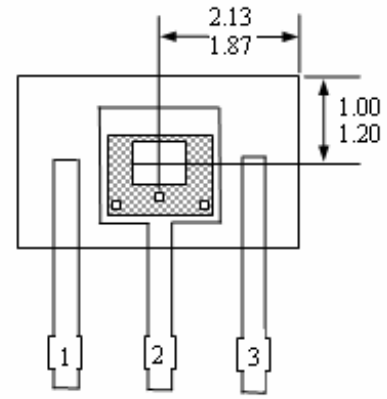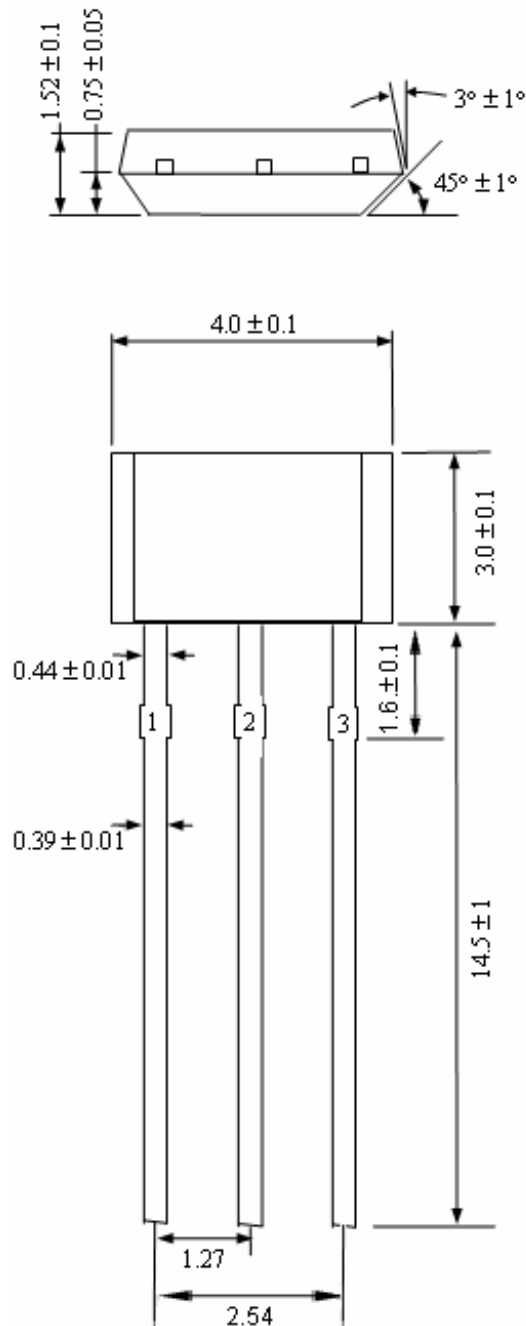


Sensor Location

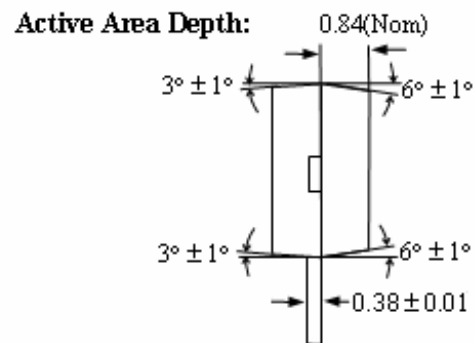

Notes:

- 1). Controlling dimension : mm ;
- 2). Leads must be free of flash and plating voids ;
- 3). Do not bend leads within 1 mm of lead to package interface ;
- 4). PINOUT: Pin 1 VDD
Pin 2 GND
Pin 3 Output

Package AT, 3-Pin SOT-23:

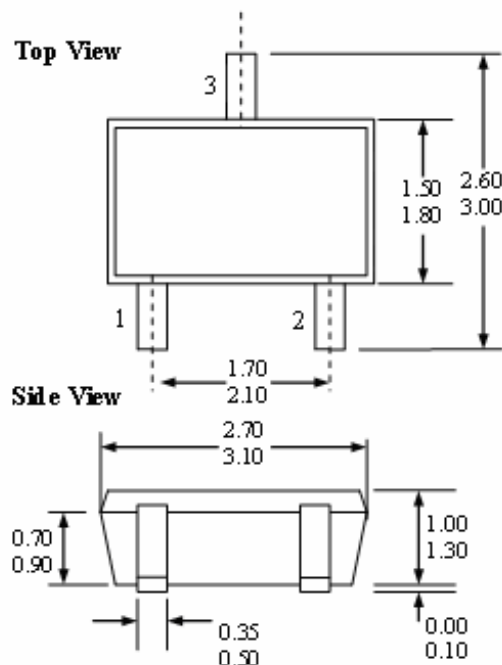


Notes:

- 1). PINOUT: Pin 1 VDD
Pin 2 Output
Pin 3 GND
- 2). All dimensions are in millimeters ;

Marking:

44 -- Code of Device ;
yy -- last 2 digit of year ;
m -- Production Lot ;

End View

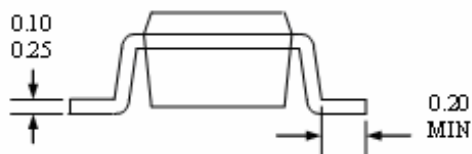

Ordering Information

| Part No. | Pb-free | Temperature Code | Package Code | Packing |
|-----------|---------|------------------|--------------|-------------------------------|
| SS441ESOT | YES | -40°C to 85°C | SOT-23 | 7-in. reel, 3000 pieces/ reel |
| SS441EUA | YES | -40°C to 85°C | TO-92 | Bulk, 1000 pieces/ bag |
| SS441KSOT | YES | -40°C to 125°C | SOT-23 | 7-in. reel, 3000 pieces/ reel |
| SS441KUA | YES | -40°C to 125°C | TO-92 | Bulk, 1000 pieces/ bag |
| SS441LSOT | YES | -40°C to 150°C | SOT-23 | 7-in. reel, 3000 pieces/ reel |
| SS441LUA | YES | -40°C to 150°C | TO-92 | Bulk, 1000 pieces/ bag |