

RAYCHEM PolySwitch Resettable Fuses

tyco
Electronics


RAYCHEM TVB SERIES SIBAR THYRISTOR SURGE PROTECTORS

Features:

- Bidirectional transient voltage protection
- High off-state impedance
- Low on-state voltage
- Glass-passivated junctions
- Short-circuit failure mode
- Surface-mount technology

For quantities of 2000 and up, call for quote.

MOUSER STOCK NO.		VDM Max (V)	VBo Max (V)	IH Min (mA)	VT Max (V)	C1 Min (A)	ITSM Min (A)	Price Each			
Mfr.	Mfr. Stock No.							1	100	500	1000
650—TVB270SC		270	370	175	5.0	50	60	.55	.44	.40	.38
650—TVB270SA		270	370	175	5.0	20	22	.31	.24	.22	.22

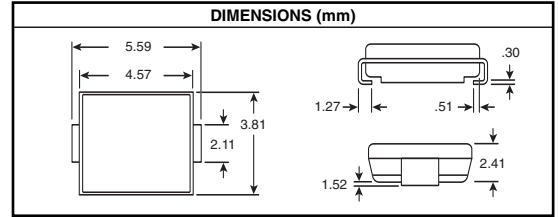


RAYCHEM LTP SERIES

Raychem's PolySwitch Strap Battery Resettable device offers overcurrent protection for rechargeable batteries at elevated temperatures. Made with weldable nickel terminals, and is fully compatible with current industry standards

Applications:

- Mobile phone battery packs
- Cordless phone battery packs
- Computer and PDA battery packs
- Camcorder battery packs

Cross-Reference Chart		
Raychem LTP(XXX)	Wickmann LTD(XX)	Bourns MF-LS(XXX)

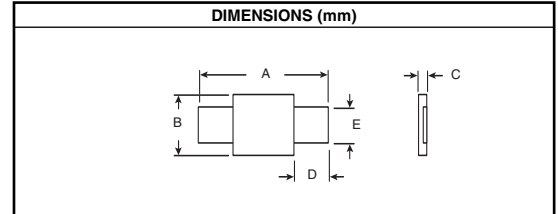

For quantities of 1000 and up, call for quote.


MOUSER STOCK NO.		VMax. Interrupt	Max. Current	Hold Current	Trip Current	Time to Trip (sec. @ A)	Dimensions (mm)					Resistance Ω		Price Each			
Mfr.	Mfr. Stock No.						A	B	C	D	E	Min.	Max.	1	10	100	500
650—LTP070		15	100	.70	1.50	5.0 @ 3.5	22.1	5.2	1.2	7.5	4.1	.100	.200	.43	.37	.34	.31
650—LTP100		24	100	1.00	2.50	7.0 @ 5.0	23.1	5.2	1.0	5.5	4.1	.070	.130	.43	.37	.34	.31
650—LTP180		24	100	1.80	3.80	2.9 @ 9.0	26.0	5.2	1.0	5.5	4.1	.040	.068	.43	.37	.34	.31
650—LTP190		24	100	1.90	4.20	3.0 @ 10.0	23.4	11.0	1.1	7.6	5.4	.030	.057	.43	.37	.34	.31

RAYCHEM SRP SERIES

Raychem's SRP Series offers the lowest resistance in ohm value when it comes to choosing a PolySwitch Resettable Device for your battery protection needs. The SRP can handle up to 30 volts DC with a trip rating of 7.6 amps.

Applications:

- Mobile phone battery packs
- Cordless phone battery packs
- Computer and PDA battery packs
- Camcorder battery packs

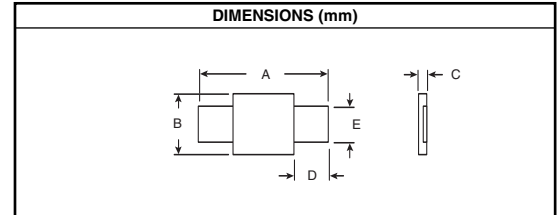


For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.		VMax. Interrupt	Max. Current	Hold Current	Trip Current	Time to Trip (sec. @ A)	Dimensions (mm)					Resistance Ω		Price Each			
Mfr.	Mfr. Stock No.						A	B	C	D	E	Min.	Max.	1	10	100	500
650—SRP120		15	100	1.2	2.7	5.0 @ 6.0	22.1	1.0	5.2	7.5	7.5	0.085	0.16	.39	.34	.31	.28
650—SRP175		15	100	1.75	3.8	5.0 @ 8.75	23.1	1.0	5.2	7.5	5.5	0.05	0.09	.39	.34	.31	.28
650—SRP200		30	100	2	4.4	4.0 @ 10.0	23.4	1.1	11.0	7.6	7.6	0.03	0.06	.42	.37	.34	.31
650—SRP350		30	100	3.5	6.3	3.0 @ 20.0	31.8	1.1	13.5	8.9	8.9	0.017	0.031	.45	.39	.36	.33
650—SRP420		30	100	4.2	7.6	6.0 @ 20.0	32.4	1.1	13.6	7.5	7.5	0.012	0.024	.45	.39	.36	.33

RAYCHEM TR & TS SERIES POLYSWITCH TELECOM AND NETWORK RESETTABLE FUSES

Features:

- Resettable overcurrent protection
- Fast time to trip
- Low parasitic capacitance / flat impedance with frequency

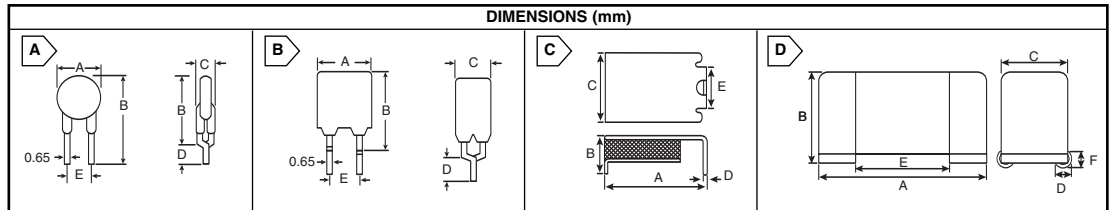

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.		Fig.	VMax. Interrupt	Max. Current	Hold Current	Trip Current	Time to Trip (A @ sec.)	Dimensions (mm)					Resistance Ω		Price Each			
Mfr.	Mfr. Stock No.							A	B	C	D	E	Min.	Max.	1	10	100	500
650—TR250-080U		A	250	3	0.08	0.16	.35 @ 3.00	4.8	9.1	3.8	4.7	5.0	14.0	20.0	.73	.67	.61	.49
650—TR250-120		B	250	3	0.12	0.24	1.00 @ 1.50	6.5	11.0	4.6	4.7	5.0	4.0	8.0	.47	.41	.38	.35
650—TR250-145		B	250	3	0.145	0.29	1.00 @ 2.50	6.5	11.0	4.6	4.7	5.0	3.0	6.0	.47	.41	.38	.35
650—TRF250-180		A	250	10	0.18	0.65	3.00 @ 0.50	9.0	12.0	3.8	4.7	5.0	8.0	22.0	.51	.45	.41	.38
650—TR600-150		B	600	3	0.15	0.3	1.00 @ 5.00	13.5	12.6	6.0	4.7	5.0	6.0	12.0	1.22	1.12	1.02	.82
650—TR600150RA-B-0.5		B	600	3	0.15	0.3	1.00 @ 5.00	13.5	12.6	6.0	4.7	5.0	7.0	10.0	.84	.73	.67	.61
650—TR600-160		B	600	3	0.16	0.32	1.00 @ 7.00	16.0	12.6	6.0	4.7	5.0	4.0	10.0	.81	.71	.65	.59
650—TR600160RAB.5.13		B	600	3	0.16	0.32	1.00 @ 7.00	16.0	12.6	6.0	4.7	5.0	4.0	10.0	.88	.77	.70	.64
650—TS250-130		C	250	3	0.13	0.23	1.00 @ .90	9.4	3.4	7.4	0.3	3.8	6.5	12.0	.64	.56	.51	.47
650—TS250-130-RA		C	250	3	0.13	0.23	1.00 @ 1.40	9.4	3.4	7.4	0.3	3.8	6.5	9.0	.66	.57	.52	.48
650—TS600-170		D	600	3	0.17	0.4	1.00 @ 10.00	19.4	12.3	8.3	2.4	10.4	4.0	9.0	1.03	.90	.82	.75